


**ESTRATTORI TEMPRATI TESTA CILINDRICA DIN 1530
HARDENED EJECTOR PINS DIN 1530**

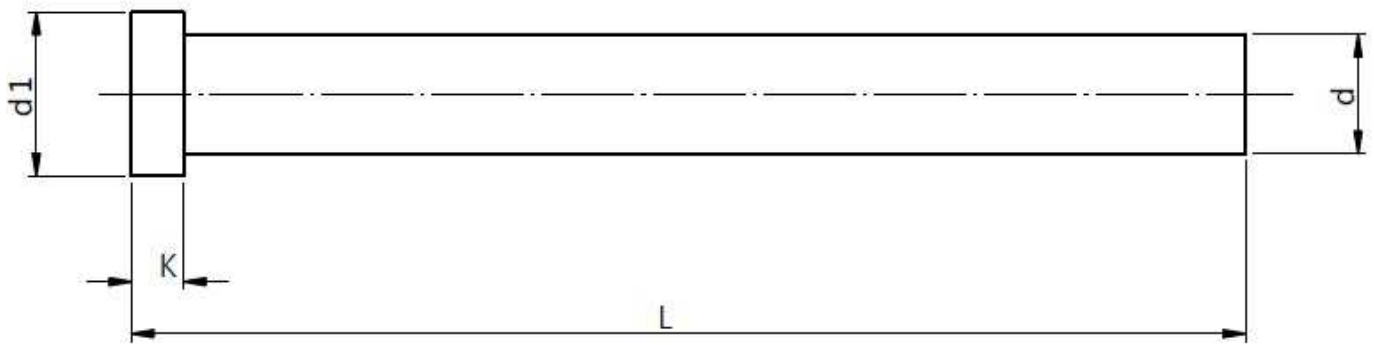

Mat.: 1.2067

dg6	d1	k	Lunghezze						
			100	125	160	200	250	315	400
1,0 - 1,4	3	1,5	√						
1,5			√	√	√	√			
1,6 - 1,9	4	2	√						
2			√	√	√	√	√		
2,2			√	√	√	√	√		
2,5			√	√	√	√	√		
3	6	3	√	√	√	√	√	√	√
3,2			√	√	√	√	√	√	√
3,5	7		√	√	√	√	√	√	√
4	8		√	√	√	√	√	√	√
4,2			√	√	√	√	√	√	√
4,5			√	√	√	√	√	√	√
5	10	√	√	√	√	√	√	√	
5,2		√	√	√	√	√	√	√	
5,5		√	√	√	√	√	√	√	
6,0		12	√	√	√	√	√	√	√
6,2	√		√	√	√	√	√	√	
6,5	√		√	√	√	√	√	√	
7,0	√		√	√	√	√	√	√	
7,5	√		√	√	√	√	√	√	
8,0	14	5	√	√	√	√	√	√	√
8,5			√	√	√	√	√	√	√
9,0			√	√	√	√	√	√	√
10,0	16		√	√	√	√	√	√	√
10,5			√	√	√	√	√	√	√
11,0	18	√	√	√	√	√	√	√	
12,0		7	√	√	√	√	√	√	√
14,0			√	√	√	√	√	√	√
16,0	√		√	√	√	√	√	√	
18,0	√		√	√	√	√	√	√	
20,0	26	8	√	√	√	√	√	√	√